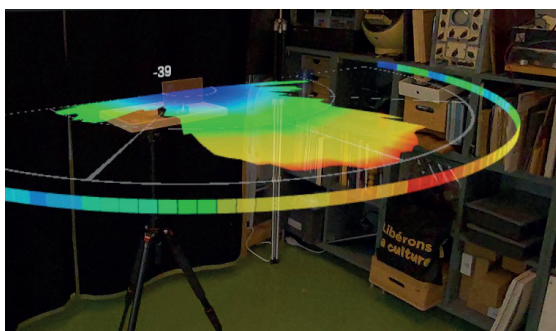# Card Reader

USB

The antenna card reader allows you to read information from various Luxondes sensors.

The It is compatible with:
the Android console application and the PC data acquisition software (free)

- Pre-scan activation
- Real-time threshold adjustment
- Acquisition/sec setting

- Data recording
- Antenna board recognition

Measurement report in PDF format

Information Data

	Data 1
Filename	20211028-110512_2D_Freq
Date	28/10/2021
Instrument	ROHDE & SCHWARZ FPC 1500
Frequency band	100.0 to 300.0 KHz
Range Y	53.3 to 117.5 dBµA/m
Height mapping	3.4 cm
Viewer version	2.2c_alpha10 - 28 oct. 2021
Scanphone version	2.51 - 23 sept. 2021

LUXONDES
See the electromagnetic waves